


T5/5+5PNP-3

Product summary:

Block of quadruple passive satellite & single terrestrial taps, higher tap losses

Brief description:

5in/5out+5tap cascable tap for distribution of terrestrial and satellite signals from 1 satellite position (4 polarities). Passive design of taps brings about higher tap loss.

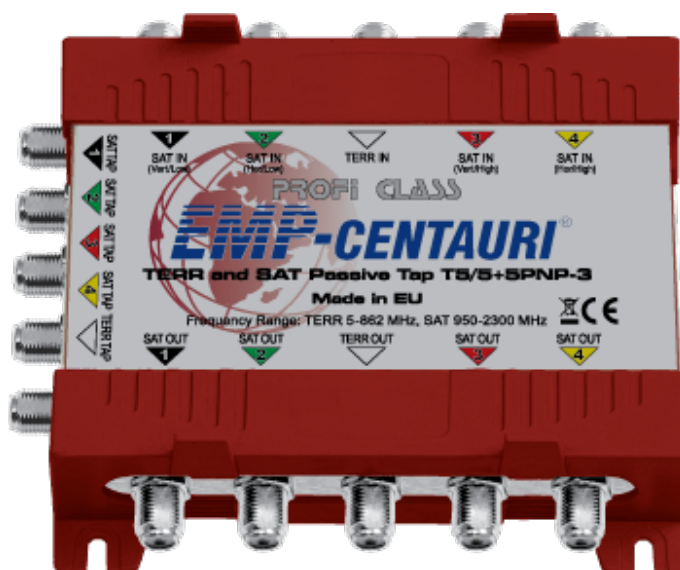

Technical data:

Parameter	Condition	Value
Frequency range	Sat. trunks	950-2300 MHz
	Terr. trunk	5-862 MHz,
	Sat. tap outputs	950-2300 MHz,
	Terr. tap output	5-862 MHz
Tap loss	Sat.	11 dB avg
	Terr.	11 dB avg
Trunk loss	Sat.	2 dB avg
	Terr.	3 dB avg
Isolation between trunks		30 dB min
Dimensions (w,d,h)		12.7 x 10.4 x 4.1 cm
Temperature range		-30 ~ +70°C
Weight		0.290 kg