

MODEL L-23i

CABINET DROP-DOWN TV LIFT

For Up to 32" TV



Lift Extends _____	23" [58.4 cm] Downwards
TV Maximum Screen Size _____	32"
Maximum Weight _____	75 lbs [34 kg]

Compact and quiet, Model L-23i is the perfect choice for lowering small screens and monitors. With slim dimensions and easy adjustability, this lift is used in kitchens, watercraft and luxury vehicles around the world. It includes a wireless remote, wired backup controls and optional smart home integration kit providing limitless exibility for installation and control.

- Slim Design
- Universal Mounting Patterns
- Near Silent Operation
- Popular for Kitchens, Bars and RVs



Nexus 21 solutions come complete with everything required for assembly and installation. Motorized systems are covered by a 10-year warranty and all products are backed by our world-class product support team.


MODEL L-23i

TECHNICAL SPECIFICATIONS

- 75 lbs [34 kg] total lift capacity
- TV maximum screen size: 32"
- Travels 23" [58.4 cm]
- No exposed tracks, gears or scissors
- Accommodates standard VESA mounts: 75mm x 75mm, 100mm x 100mm, 200mm x 100mm, 200mm x 200mm
- UL recognized components
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 1.7" / sec. (only 13 sec. to fully lower)
- Quiet - runs at just 45 dB
- Chain-driven mechanism
- Steel construction
- Choice of RF remote, Control System Integration Kit (includes IR remote and contact closure interface), or IP control device
- Exclusive Nexus 21 Safety Features included
- "Soft Start" and "Soft Stop" for smooth ride
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V

WHAT'S IN THE BOX


- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Heavy duty monitor hanger with universal mounting pattern
- Lid plate with finger safety
- Base plate and upper back mounting brackets
- Control box with power cord
- Remote control and receiver (your choice of RF, CSI Kit*, or IP control device) - Backup control switch
- Cord control wraps
- All hardware for assembly and mounting
- Full assembly instructions with photos

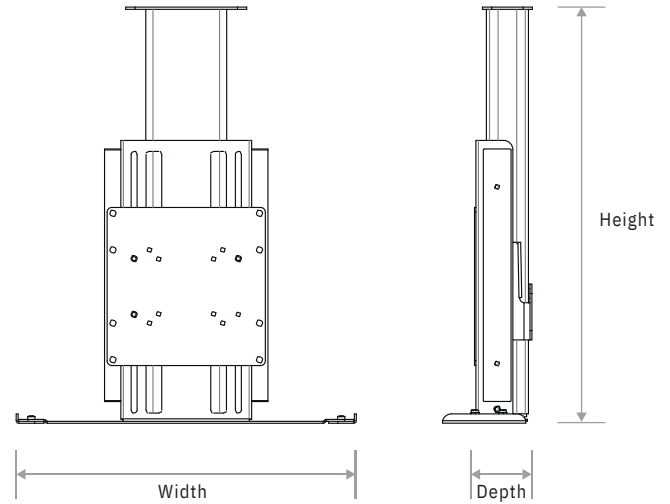

Height: 22.25" [56.5 cm]
Width: 18.25" [46.4 cm]
Depth: 3.125" [7.9 cm] from back wall to rear of TV

CONTROL OPTIONS

Choice of RF remote, CSI Kit*, or IP control device. Wired button pad included with all.

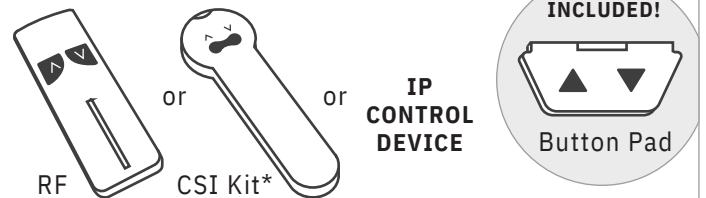

*CSI Kit (Control System Integration) includes IR remote and contact closure interface

MOUNTING BRACKET FOR COVER PLATE

Attach any type of cover to the lid plate to seamlessly hide the lift within the ceiling or cabinet. Spring loaded lid stabilization hardware included.

