

MODEL L-27i

DROP-DOWN TV LIFT

For Up to 48" TV



Lift Extends	26.5" [67.3 cm]	Downwards
TV Maximum Screen Size	48"	
Maximum Weight	90 lbs [40.8 kg]	

Model L-27i packs an incredible combination of features into a compact and powerful system. Smooth motion, quiet operation and industry-leading reliability have made this lift the choice of homeowners and professionals around the world. Popular uses include lowering your TV from the ceiling, above built-in fireplaces and in outdoor patio enclosures.

- Industry-Leading Reliability
- Near Silent Operation
- Includes Mounting Kit for Your Ceiling Cover
- Popular for Bars and Outdoor Patios




Nexus 21 solutions come complete with everything required for assembly and installation. Motorized systems are covered by a 10-year warranty and all products are backed by our world-class product support team.

MODEL L-27i

TECHNICAL SPECIFICATIONS

- 90 lbs [40.8 kg] total lift capacity
- TV maximum screen size: 48"
- Travels 26.5" [67.3 cm]
- No exposed tracks, gears or scissors
- UL recognized
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 1.7" / sec. (only 15 sec. to fully lower)
- Quiet - runs at just 45 dB
- Chain-driven mechanism
- Steel construction
- Choice of RF remote, Control System Integration Kit (includes IR remote and contact closure interface), or IP control device
- Exclusive Nexus 21 Safety Package included
- "Soft Start" and "Soft Stop" for smooth ride
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V

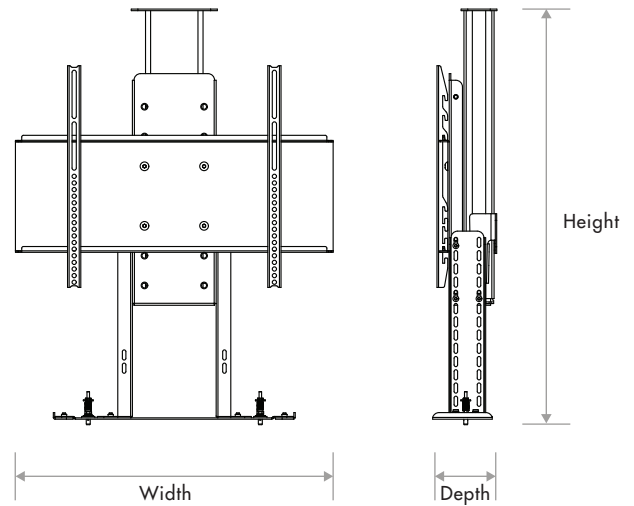


Height: 23" [58.4 cm] Min / 35" [88.9 cm]
Width: 24" [61 cm]
Depth: 4.5" [11.4 cm] from back wall to rear of TV

WHAT'S IN THE BOX

- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Heavy duty screen support with universal TV mounting plate
- Lid plate with adjustable extensions and finger safety
- Base plate and upper back mounting bracket
- Control box with power cord
- Remote control and receiver (your choice of RF, CSI Kit*, or IP control device)
- Backup control switch
- Cord control wraps
- All hardware for assembly and mounting
- Full assembly instructions with photos

CONTROL OPTIONS

Choice of RF remote, CSI Kit*, or IP control device. Wired button pad included with all.

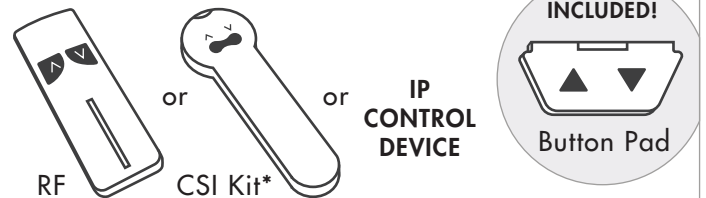

*CSI Kit (Control System Integration) includes IR remote and contact closure interface

MOUNTING BRACKET FOR CEILING COVER

Attach any type of cover to the lid plate to seamlessly hide the lift within the ceiling or cabinet. Spring loaded lid stabilization hardware included.

