



MODEL L-77i

CEILING DROP-DOWN TV LIFT

For Up to 86" TV

Lift Extends	52" [132.1 cm] Downwards
TV Maximum Screen Size	86"
Maximum Weight	150 lbs [68.1 kg]
(Max weight includes TV + soundbar + ceiling cover panel)	

Model L-77i provides the perfect solution when TV placement is a challenge. In a room with no wall or cabinet available for the TV, choose instead to conceal it in the ceiling. L-77i reveals the TV, lowering it to the perfect viewing position, at the touch of a single button.

This unit can be installed in the ceiling and can also be mounted on vertical surfaces, such as areas with transitional height ceilings.

ALL NEW DESIGN WITH
NEXT-GENERATION MOTORIZATION




Nexus 21 products come complete with everything required for assembly and installation. They are covered by a 10-year warranty (5 years for commercial applications) and are backed by our world-class product support team.

MODEL L-77i

TECHNICAL SPECIFICATIONS

- 150 lbs [68.3 kg] total lift capacity
- TV maximum screen size: 86"
- 52" [132 cm] downward travel
- No exposed tracks, gears or scissors
- UL recognized components
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Quiet - runs at just 45 dB
- Steel construction
- Choice of RF remote, Control System Integration Kit (includes IR remote and contact closure interface), or IP control device
- Exclusive Nexus 21 safety features included
- "Soft Start" and "Soft Stop" for smooth ride
- Professional installation required
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V

Designed for ceiling height of 8-10 feet [2.4-3.0 meters]

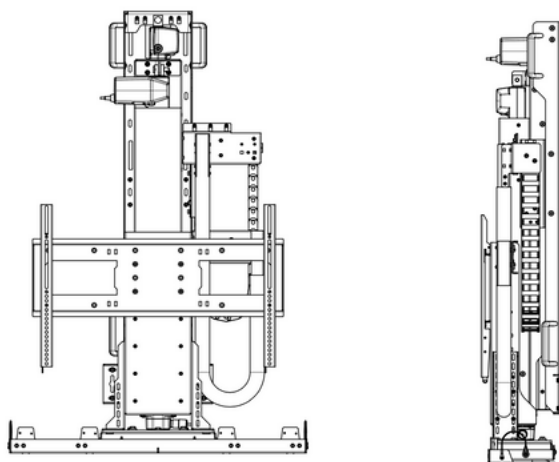


Detailed build dimensions and diagrams are available for download at Nexus21.com

WHAT'S IN THE BOX

- Motorized lift system (main unit is pre-assembled and ready to use)
- Heavy duty screen support with universal TV mounting plate
- Adjustable bracket for mounting ceiling panel
- Innovative, time-saving installation process
- Control box with power cord
- Remote control and receiver (your choice of RF, CSI Kit*, or IP control device)
- Backup control switch
- Cable management system for up to 4 AV cables
- All hardware for assembly and mounting
- Full assembly instructions

CONTROL OPTIONS

Choice of RF remote, CSI Kit*, or IP control device. Wired button pad included with all.



RF



CSI Kit*

or
IP
CONTROL
DEVICE



**CSI Kit (Control System Integration) includes IR remote and contact closure interface*

MOUNTING SYSTEM FOR CEILING COVER

Match any ceiling material to seamlessly hide the lift within the ceiling (weight limit applies). Ceiling panel bracket has fine-tuning adjustments for angular, vertical, and lateral positions.

