


MODEL DL-65en DIAGRAM WITH SOUNDBAR - PRIMARY ENCLOSURE DIMENSIONS

SPECIFICATIONS

MAX WEIGHT CAPACITY : 175 lbs [79.4 kg]
COMBINED WEIGHT OF THE TV, SOUNDBAR, ALL ACCESSORIES, INTERIOR ENCLOSURE, AND CABINET LID
MAX TRAVEL [EXTENSION] : 38.5 in [97.7 cm]
LIFT SYSTEM HEIGHT : 31.875 in [81 cm] TO 42.875 in [108.9 cm]
MAX TV + SOUNDBAR HEIGHT : 37 in [94 cm] MINUS CLT MINUS EPT
CLT : CABINET LID THICKNESS
EPT : ENCLOSURE PANEL THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)

TV DIMENSIONS : TW____, TH____, TD____
SOUNDBAR DIMENSIONS : SW____, SH____, SD____
PANEL THICKNESS : EPT____, CLT____
MIN. INTERIOR ENCLOSURE WIDTH : TW + 1.5 in [3.8 cm] OR SW + 1.5 in [3.8 cm] = ____ OR 31.75 in [80.6 cm]
MIN. INTERIOR ENCLOSURE HEIGHT : TH + SH + 1.5 in [3.8 cm] = ____ OR 27.5 in [69.9 cm]
CANNOT EXCEED 38.5 in [97.8 cm] MINUS CLT MINUS EPT
MIN. INTERIOR ENCLOSURE DEPTH : TD + 6.5 in [16.5 cm] OR SD + 5.5 in [14 cm] = ____ OR 8.25 in [21 cm]

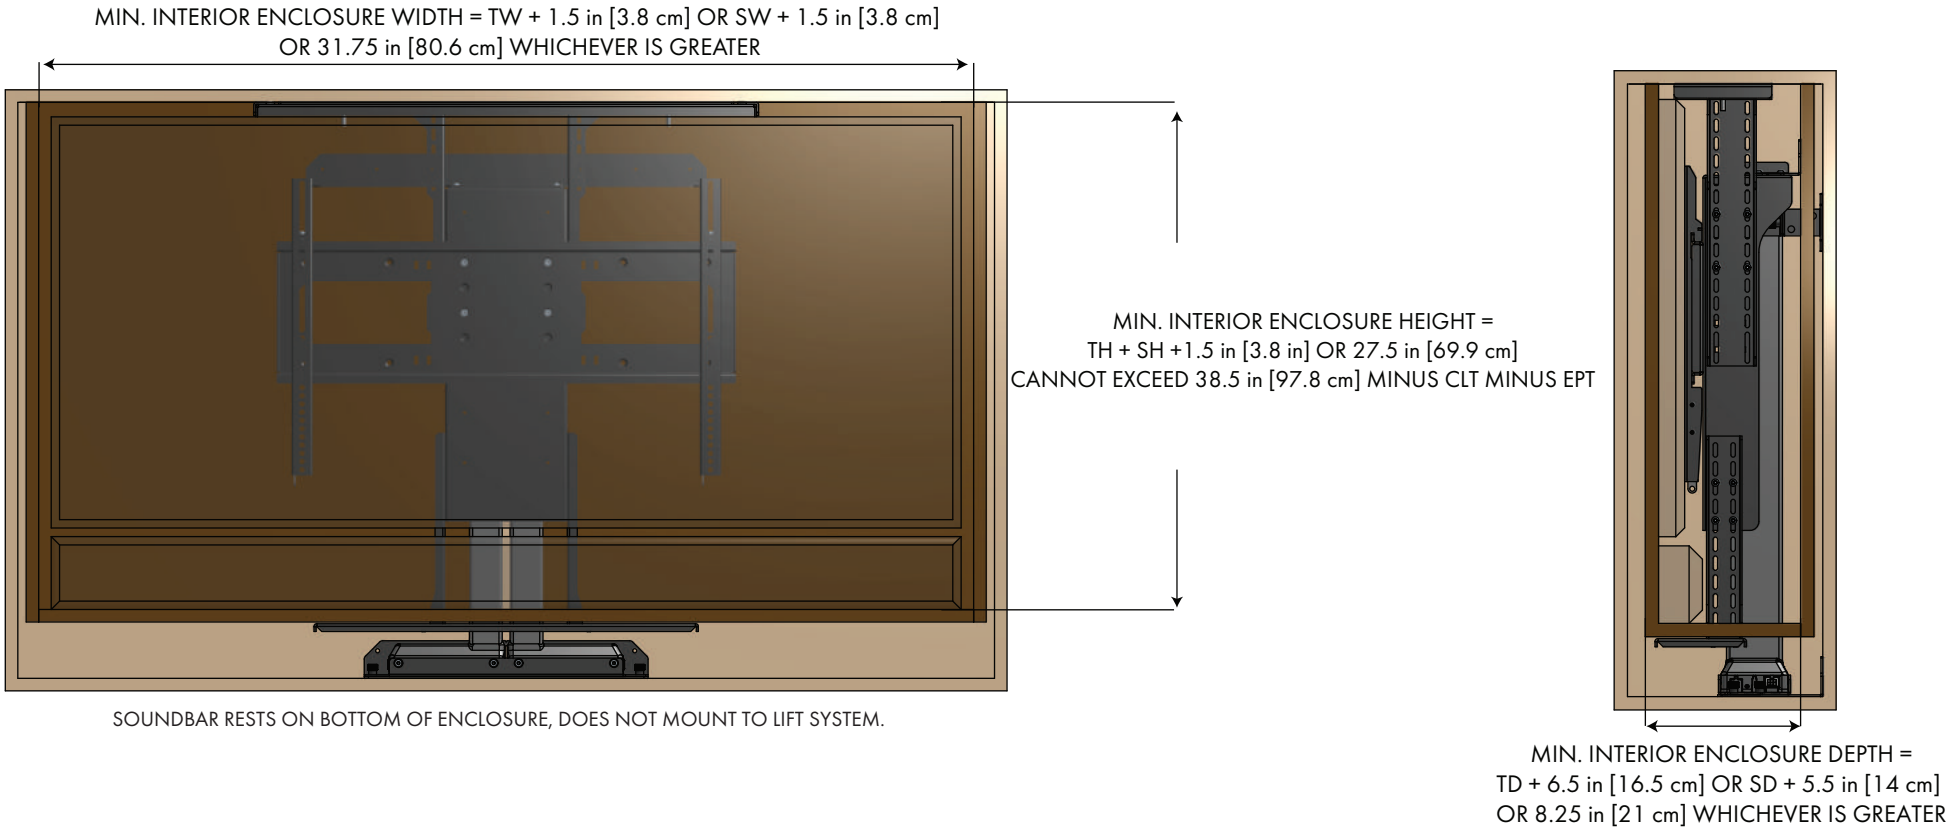


- NOTES:
1. THE CABINET BOX AND ENCLOSURE BOX SHOWN IN THE DIAGRAM ARE FOR REFERENCE ONLY, THEY ARE NOT PROVIDED WITH THE LIFT SYSTEM.
 2. FOR ENCLOSURE REFERENCE DIMENSIONS SEE PAGE 2 OF THIS DIAGRAM. FOR CABINET DIMENSIONS SEE PAGES 4 AND 5
 3. DIMENSIONAL EQUATIONS SHOWN ON THIS PAGE OF THE DIAGRAM ARE TO BE USED WITH THE DIMENSIONAL EQUATIONS FOUND ON PAGE 4
 4. WHEN DETERMINING TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "TV WITHOUT STAND" HEIGHT
 5. LIFT MECHANISM IS POWDERCOATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY

NEXUS21

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 6/4/24

MODEL DL-65en DIAGRAM WITH SOUNDBAR - PRIMARY ENCLOSURE DIMENSIONS CONT.

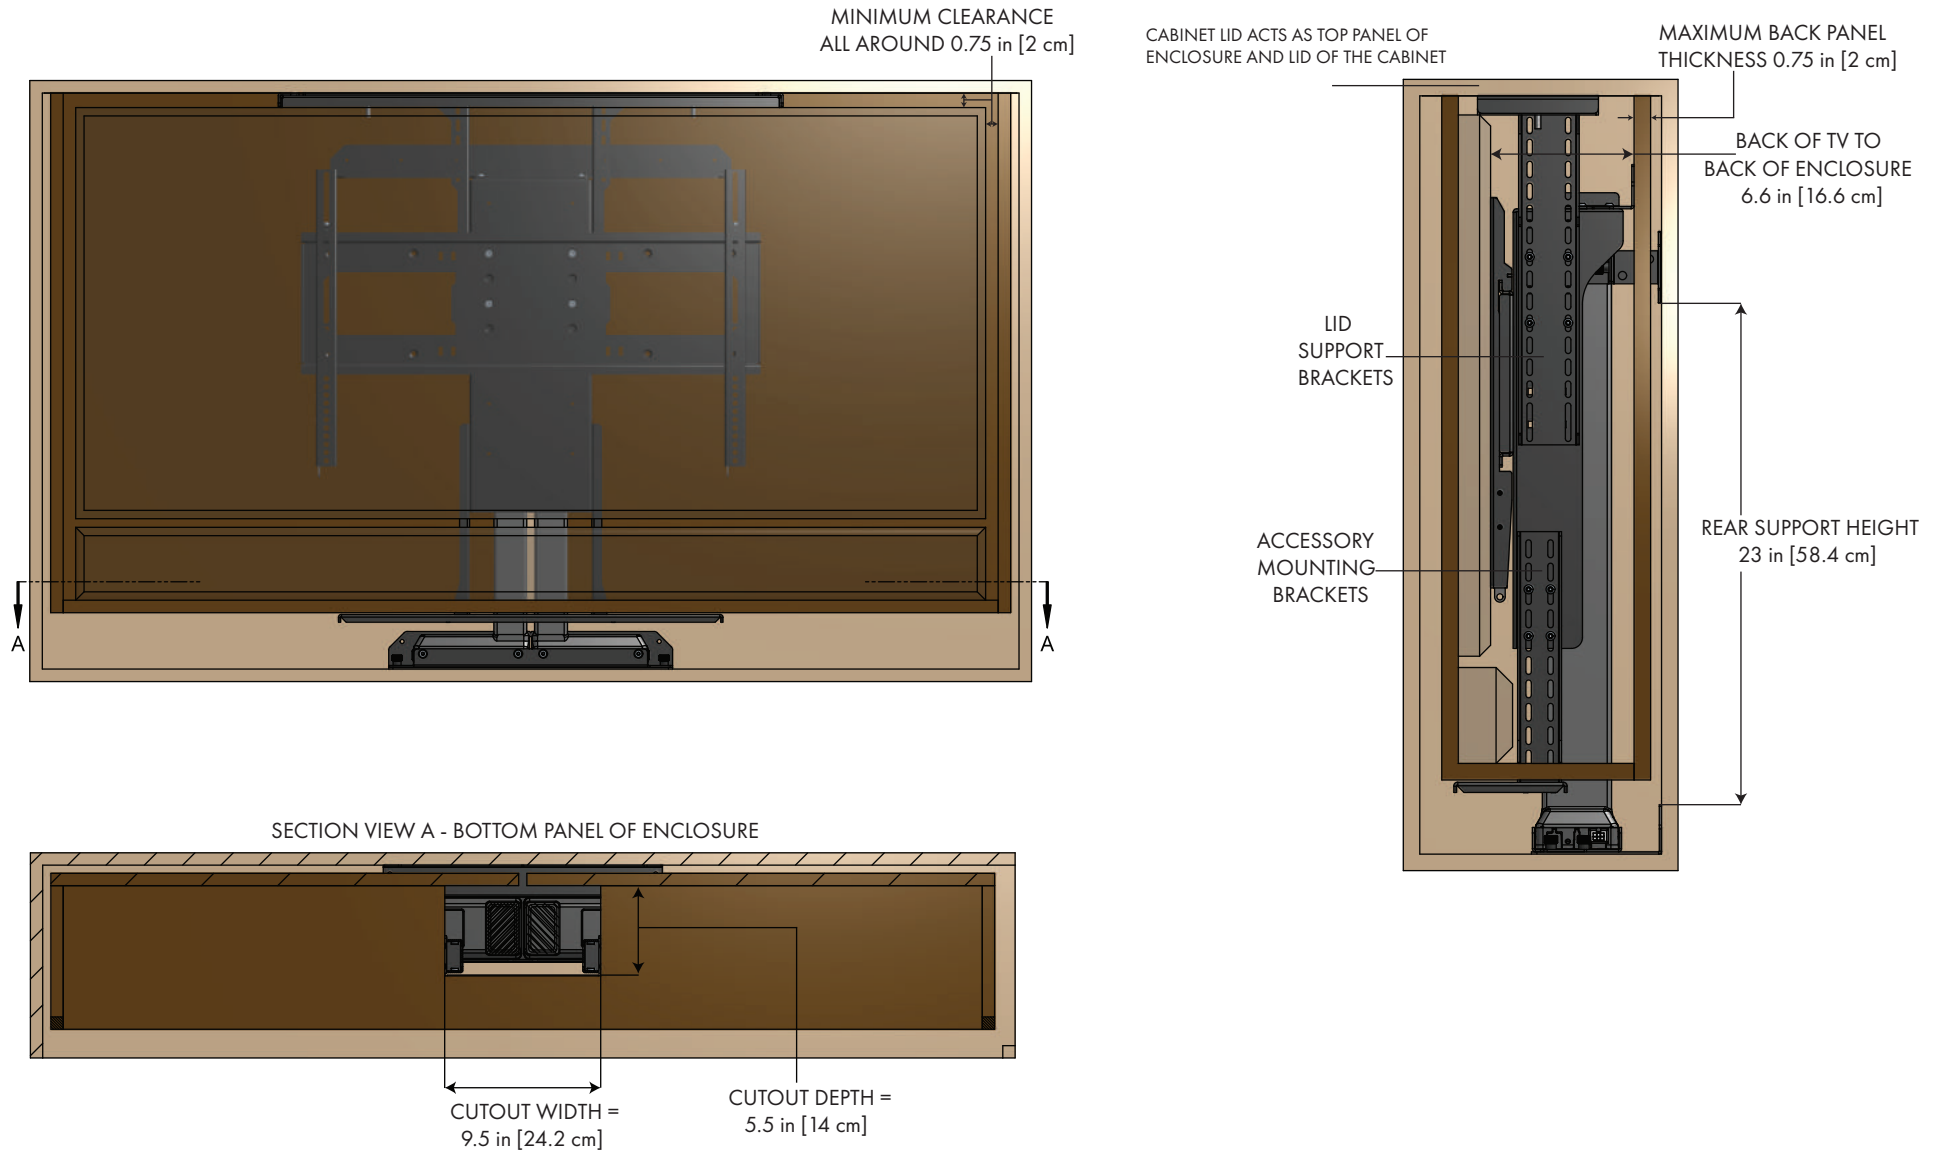


- NOTES:
1. ALL PANEL THICKNESSES FOR THE ENCLOSURE CANNOT EXCEED 0.75 in [2 cm]
 2. TOP PANEL OF ENCLOSURE IS DESIGNED TO FLOAT USING PROVIDED LID ADAPTER PLATE AND CANNOT BE FASTENED TO THE LIFT OR ENCLOSURE
 3. SECTION VIEW A REPRESENTS THE BOTTOM PANEL OF THE ENCLOSURE BOX
 4. BOTTOM PANEL OF ENCLOSURE MUST HAVE A CENTER CUOUT TO ACCOMODATE LIFT COLUMN AND BRACKETRY
 5. LID SUPPORT BRACKETS ALLOW TOP PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF THE ENCLOSURE TOP PANEL
 6. ACCESSORY MOUNTING BRACKETS ALLOW BOTTOM PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF ENCLOSURE BOTTOM PANEL
 7. INTERIOR ENCLOSURE IS TO BE A 4 SIDED BOX WITH THE CABINET LID ACTING AS BOTH THE TOP PANEL OF THE ENCLOSURE AND THE LID OF THE CABINET.

NEXUS₂₁

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 6/4/24

MODEL DL-65en DIAGRAM WITH SOUNDBAR - PRIMARY ENCLOSURE DIMENSIONS CONT.

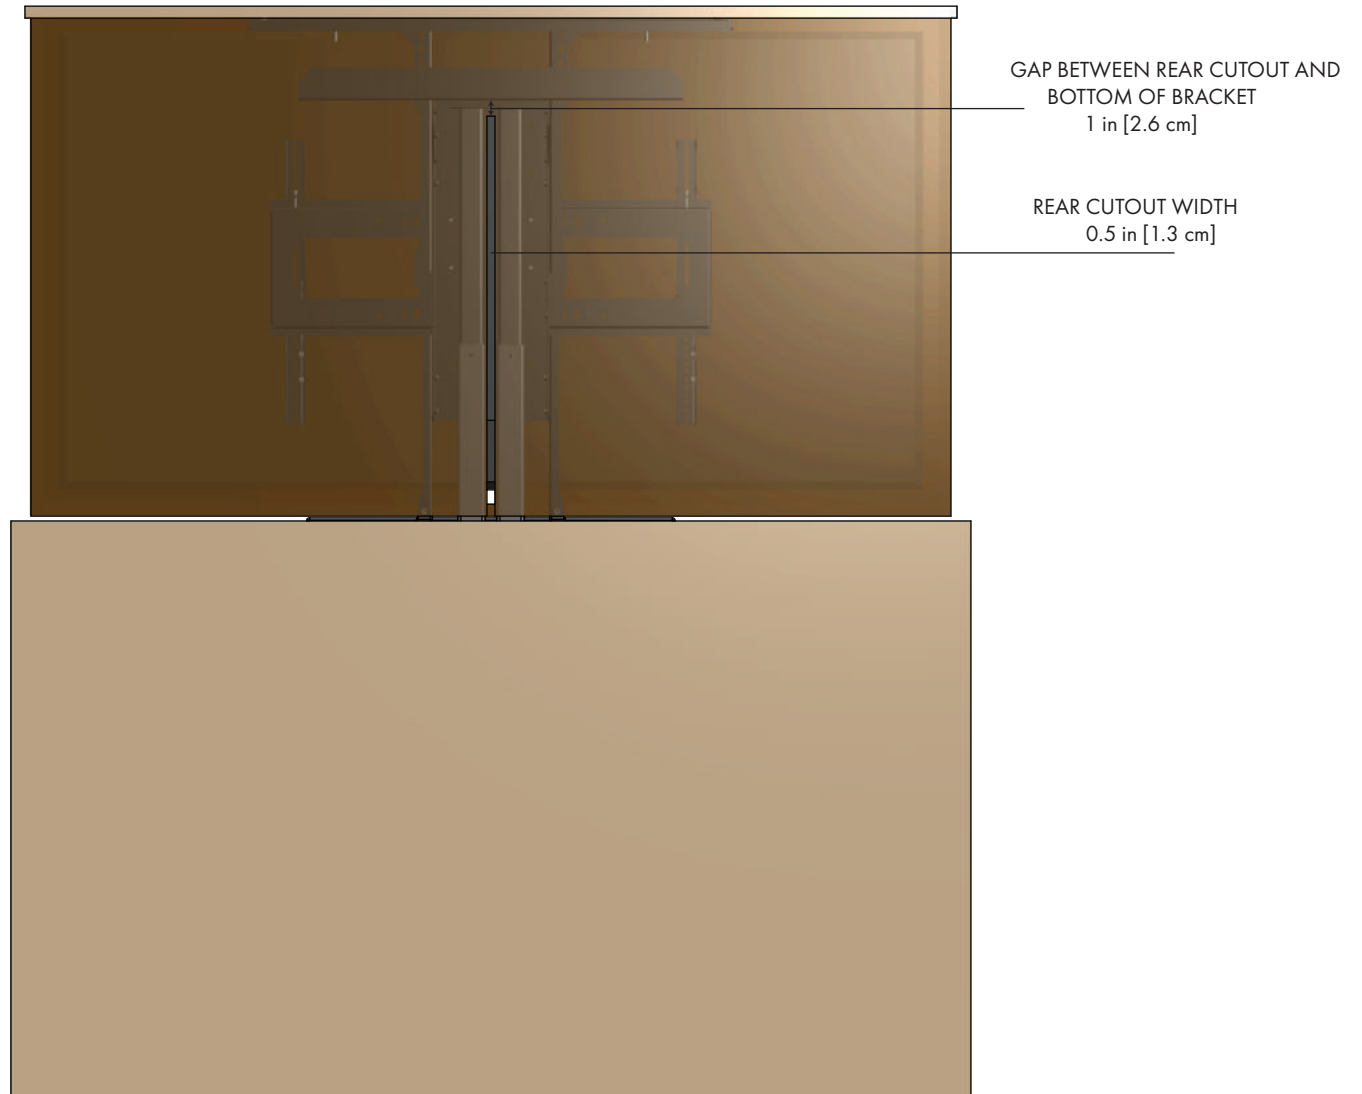

NOTES:

1. REAR PANEL OF ENCLOSURE IS TRANSPARENT FOR CLARITY
2. THE REAR SLOT MUST BE HIGH ENOUGH ON BACK PANEL OF ENCLOSURE TO ACCOMMODATE THE REAR SUPPORT BRACKET

NEXUS₂₁

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 6/4/24

MODEL DL-65en DIAGRAM WITH SOUNDBAR - PRIMARY CABINET DIMENSIONS

SPECIFICATIONS

MAX WEIGHT CAPACITY : 175 lbs [79.4 kg]
COMBINED WEIGHT OF THE TV, SOUNDBAR, ALL ACCESSORIES, INTERIOR ENCLOSURE, AND CABINET LID
MAX TRAVEL [EXTENSION] : 38.5 in [97.7 cm]
LIFT SYSTEM HEIGHT : 31.875 in [81 cm] TO 42.875 in [108.9 cm]
MAX TV + SOUNDBAR HEIGHT : 37 in [94 cm] MINUS CLT MINUS EPT
CLT : CABINET LID THICKNESS
EPT : ENCLOSURE PANEL THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)

INTERIOR ENCLOSURE DIMENSIONS : EW _____, EH _____, ED _____


PANEL THICKNESS : EPT _____, CLT _____

MIN. INTERIOR CABINET WIDTH : (EW + 2 in [5.1 cm]) + (2 x EPT) = _____ OR 35.25 in [89.5 cm]
MIN. LID CUTOOUT WIDTH :

MIN. INTERIOR CABINET HEIGHT : EH + EPT + 3.25 in [8.3 cm] = _____ OR 31.875 in [81 cm]
CANNOT EXCEED 42.875 in [108.9 cm]


MIN. INTERIOR CABINET DEPTH : ED + EPT + 1.5 in [3.8 cm] = _____ OR 9.75 in [24.8 cm]
MIN. LID CUTOOUT DEPTH :

MIN. LID CUTOOUT WIDTH = (EW + 2 in [5.1 cm]) + (2 x EPT)
OR 35.25 in [89.5 cm] WHICHEVER IS GREATER

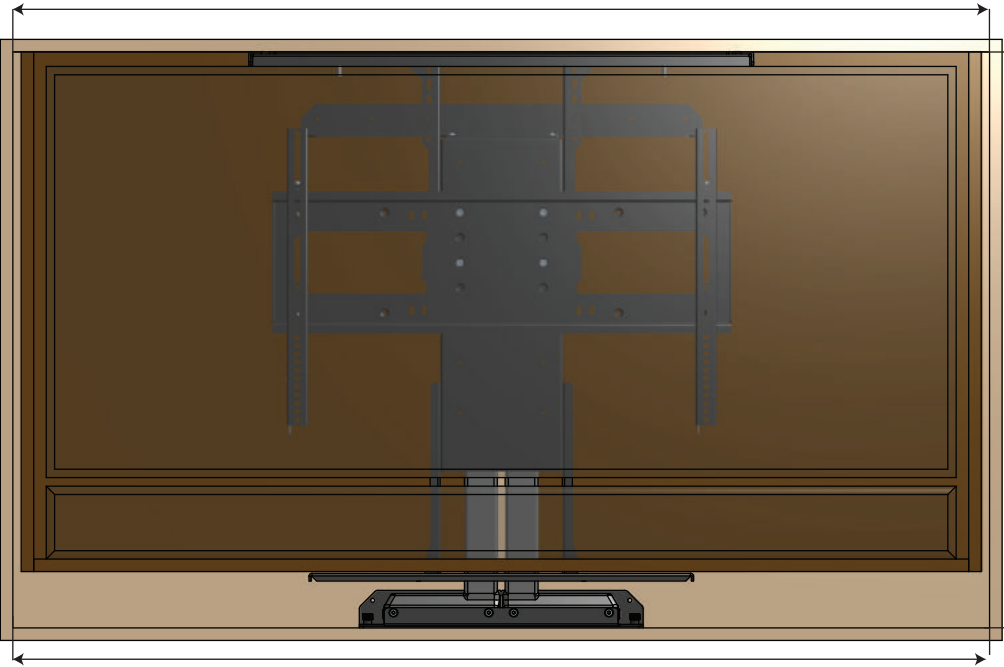

MIN. INTERIOR CABINET WIDTH = (EW + 2 in [5.1 cm]) + (2 x EPT)
OR 35.25 in [89.5 cm] WHICHEVER IS GREATER

MIN. LID CUTOOUT DEPTH =
ED + EPT + 1.5 in [3.8 cm] OR 9.75 in [24.8 cm]
WHICHEVER IS GREATER

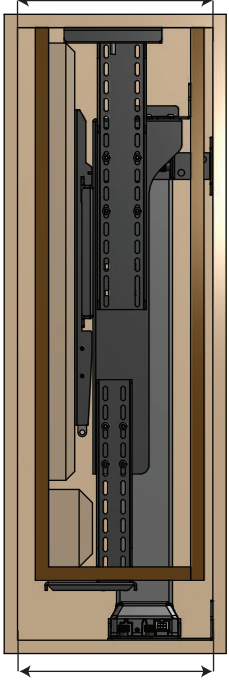


MIN. INTERIOR CABINET DEPTH =
ED + EPT + 1.5 in [3.8 cm] OR 9.75 in [24.8 cm]
WHICHEVER IS GREATER

- NOTES:
1. THE CABINET BOX AND ENCLOSURE BOX SHOWN IN THE DIAGRAM ARE FOR REFERENCE ONLY, THEY ARE NOT PROVIDED WITH THE LIFT SYSTEM.
 2. FOR CABINET REFERENCE DIMENSIONS SEE PAGE 4 OF THIS DIAGRAM. FOR ENCLOSURE DIMENSIONS SEE PAGES 1 AND 2
 3. DIMENSIONAL EQUATIONS SHOWN ON THIS PAGE OF THE DIAGRAM ARE TO BE USED WITH THE DIMENSIONAL EQUATIONS FOUND ON PAGE 1
 4. INTERIOR CABINET EQUATIONS ARE BASED ON INTERIOR ENCLOSURE DIMENSIONS FROM PAGE 1
 5. LIFT MECHANISM IS POWDERCOATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY

NEXUS21

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 6/4/24

MODEL DL-65en DIAGRAM WITH SOUNDBAR - CABINET REFERENCE DIMENSIONS

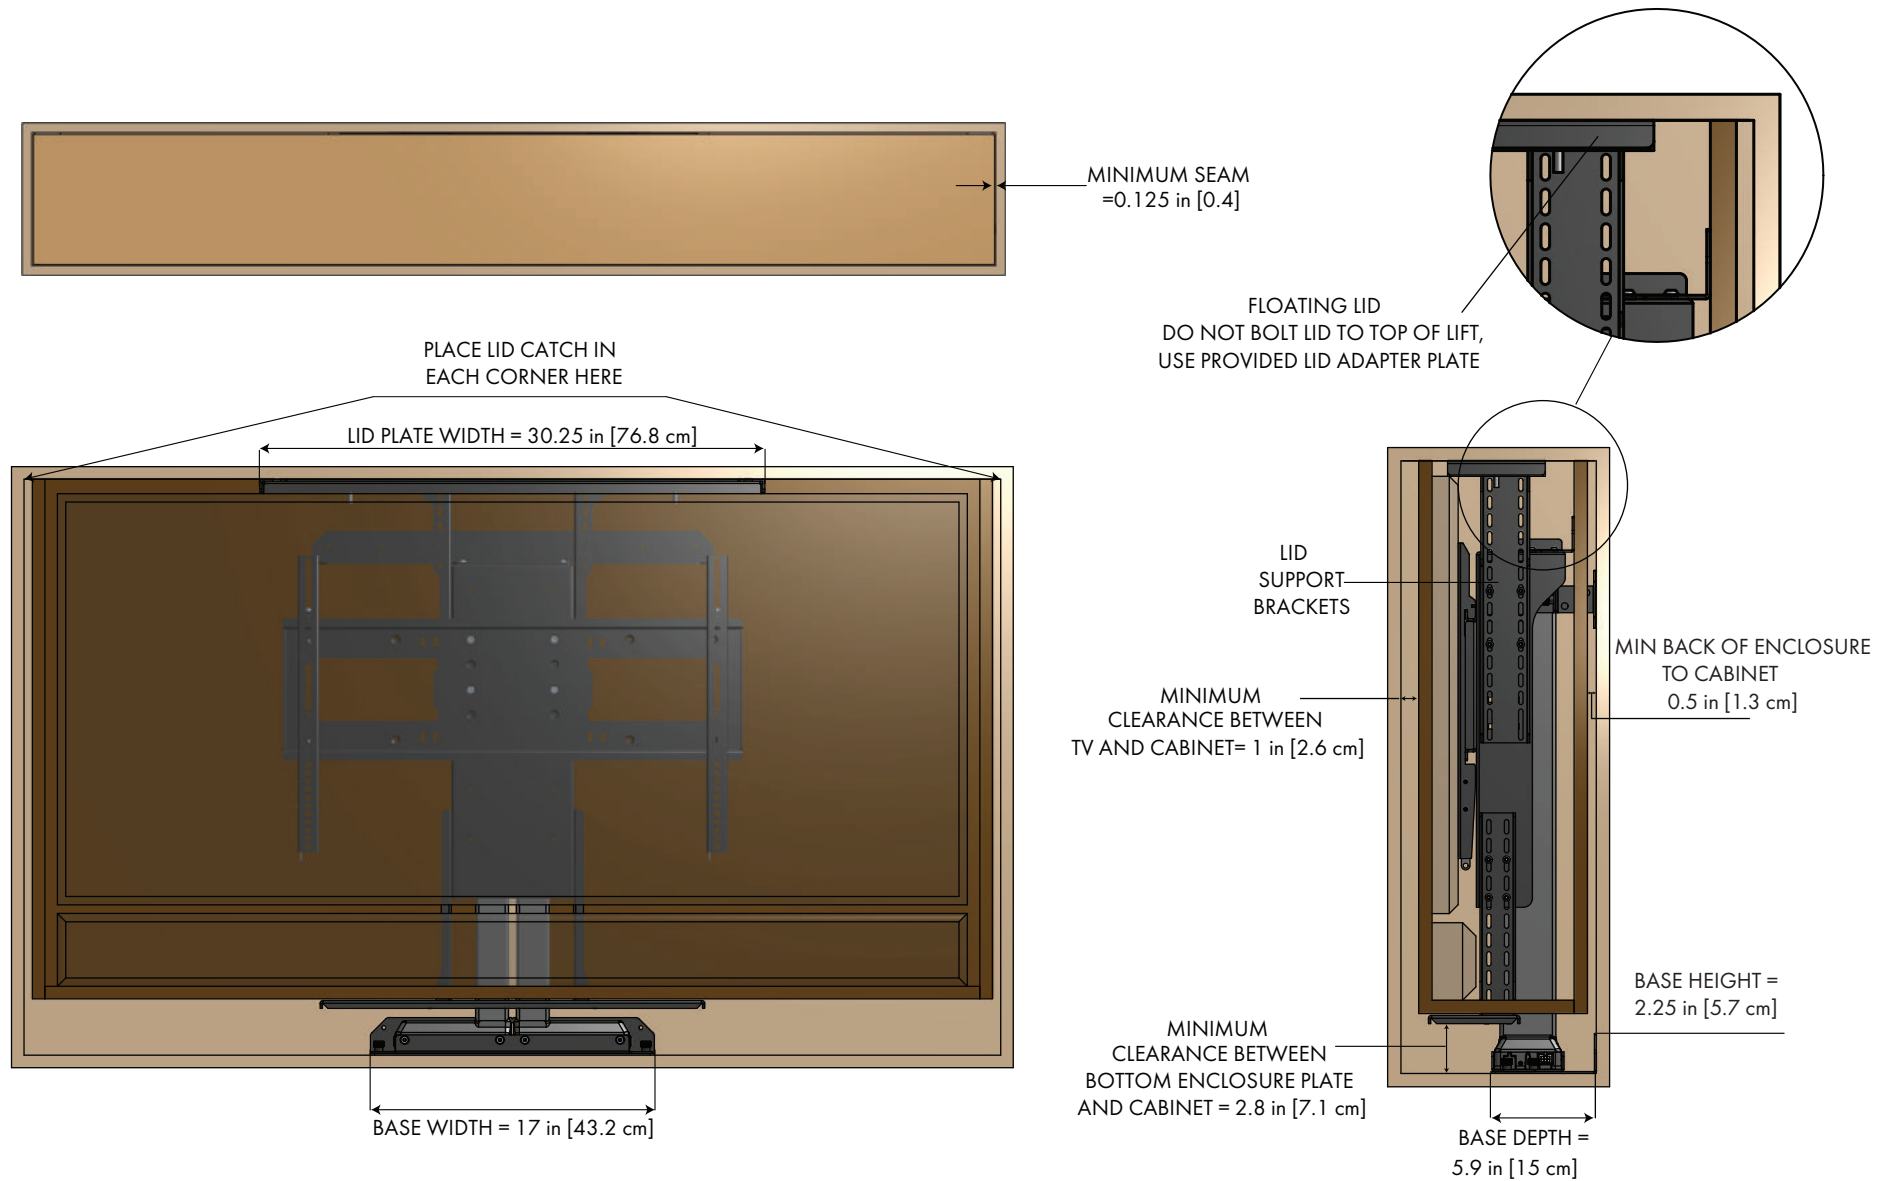

NOTES:

1. LID SUPPORTS ALLOW LID PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
2. LID ADAPTER PLATE ALLOWS LID TO FLOAT WITH THE USE OF LID CATCHES
3. MINIMUM SEAM CAN BE REDUCED TO 0.0625 in [0.2 cm] WITH A 45 DEGREE BEVEL ON THE EDGES OF THE LID

NEXUS₂₁

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 6/4/24